

ELLIOT 2W

Foglio 1 di 4

TIPO APPARECCHIO

LUCI LED DA INCASSO



CARATTERISTICHE GENERALI

| MATERIALI

Grado di protezione	IP40	CORNICE	ACCIAIO INOX AISI 316L / SATINATO / ORO PVD / NERO PVD / BIANCO 9010
Applicazione	SOFFITTO-PARETE	CORPO	PLASTICA
Dimensioni	54X54 mm	DIFFUSORE	POLICARBONATO
Recesso	16 mm		
Foratura	/		
Peso	20 gr		
Fissaggio	MOLLE		
Orientabile	No		
Flessibile	No		
Interruttore	No		

SPECIFICHE ELETTRICHE

TIPO ALIMENTAZIONE

Tensione Costante

Sorgente Luminosa	2 POWER LED		
Tipo Apparecchio	Monocolore		
Alimentazione	10-30 Vdc		
Potenza	2 W		
Assorbimento			
Dimmerabile / Dimmer Consigliato	Si / FASP094CA2A3D00 HDIM300 D00	Modalità dimmerazione	PWM



DATI ILLUMINTECNICI

Temperatura colore

ANGOLO APERTURA: 100°	BIANCO CALDO (2900-3100 °K)	BIANCO NATURALE (3800-4100 °K)	BIANCO FREDDO (5500-6500 °K)
CRI			
Flusso luminoso	100 lm	125 lm	
Efficienza			
Ø a 1 m	40,8 lux	49,1 lux	
Ø a 2 m	10,2 lux	12,3 lux	
Ø a 3 m	4,5 lux	5,5 lux	

Colori luce disponibili

-  BIANCO CALDO
-  BIANCO-ROSSO
-  BIANCO NATURALE
-  BLU
-  BIANCO-BLU
-  ROSSO



CERTIFICAZIONI



RoHS

TIPO APPARECCHIO

LUCI LED DA INCASSO


SPECIFICHE PER IL COLLEGAMENTO DEL SINGOLO APPARECCHIO

Dimensioni in mm (inches)

POTENZA: 2 W

ALIMENTAZIONE: 10-30 Vdc

ASSORBIMENTO:

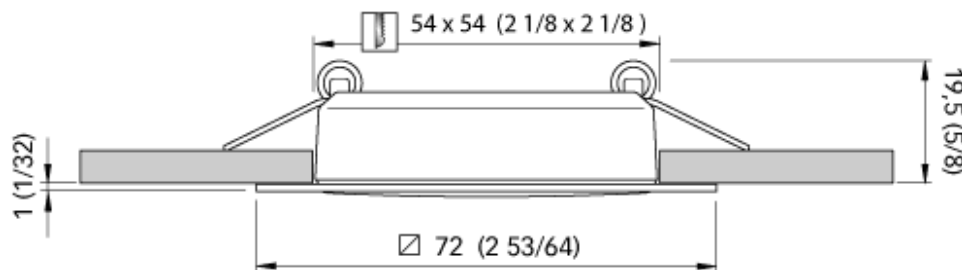

INDICAZIONI PER IL COLLEGAMENTO


AVVERTENZE

Utilizzare l'apparecchio in bassissima tensione (SELV) con alimentatore LED in **TENSIONE COSTANTE**.


Non collegare l'apparecchio direttamente alla corrente di rete (AC).

INDICAZIONI GENERALI PER COLLEGARE PIU' DI UN APPARECCHIO


Questo prodotto si può collegare in parallelo con alimentatore LED in **TENSIONE COSTANTE**.

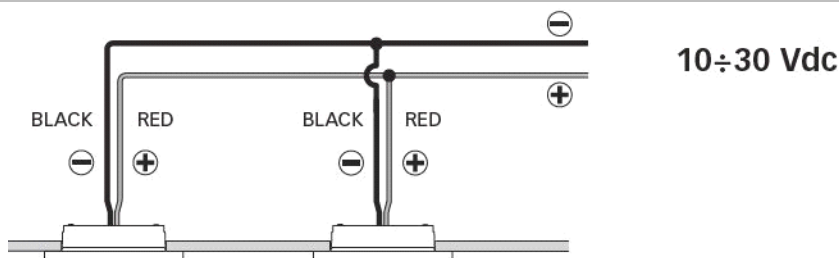

INDICAZIONI PER IL MONTAGGIO

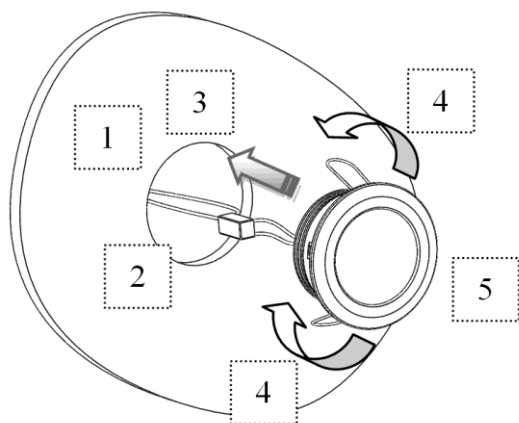

1. Praticare il foro o scasso, per il prodotto corrispondente, della misura indicata in tabella.
2. Nel pannello o muro al quale applicare il punto luce devono essere presenti i cavi provenienti dall'alimentatore.
3. Collegamento elettrico: il positivo è il cavo di colore rosso, il negativo è il cavo di colore nero.
4. Posizionare le molle come illustrato in figura per favorire l'ingresso del prodotto nel foro praticato.
5. Inserire il corpo luce all'interno del foro ruotandolo nella posizione desiderata.



Greenbox è una vasta gamma di accessori per l'installazione degli apparecchi ad incasso. Maggiori dettagli relativi alla linea **Greenbox** sul sito www.quicklighting.com

CATEGORY

DOWNLIGHT



GENERAL FEATURES

| MATERIALS

IP Protection grade	IP40
Installation on	CEILING-WALL
Dimensions	54X54 mm
Recess	16 mm
Mounting hole	/
Weight	20 gr
Fixing system	SPRINGS
Orientable	No
Flexible	No
Switch	No

BEZEL	AISI 316L STAINLESS STEEL / SATIN / GOLD PVD / BLACK PVD / WHITE 9010
BODY	PLASTIC
DIFFUSER	POLYCARBONATE

ELECTRICAL SPECIFICATIONS

TYPE OF POWER	Constant Voltage		
Light source	2 POWER LED		
Light Type	One Color		
Power supply	10-30 Vdc		
Power consumption	2 W		
Absorption			
Dimmable / Recommended dimmer	Yes / FASP094CA2A3D00 HDIM300 D00	Dimmer mode	PWM

PHOTOMETRIC DATA

Color Temperature

BEAM ANGLE: 100	WARM WHITE (2900-3100 °K)	DAY LIGHT (3800-4100 °K)	COOL WHITE (5500-6500 °K)
CRI			
Luminous flux	100 lm	125 lm	
Luminous efficacy			
Ø at 1 m 2,31 m	40,8 lux	49,1 lux	
Ø at 2 m 4,61 m	10,2 lux	12,3 lux	
Ø at 3 m 6,92 m	4,5 lux	5,5 lux	
Available light colours			
- WW - DL - WHITE-BLUE - WHITE-RED - BLUE - RED			

CERTIFICATIONS



CATEGORY

DOWNLIGHT


SPECIFICATION FOR THE CONNECTION OF INDIVIDUAL UNIT

Dimensions - mm (inches)

POWER: 2 W

POWER SUPPLY: 10-30 Vdc

OPERATING VOLTAGE

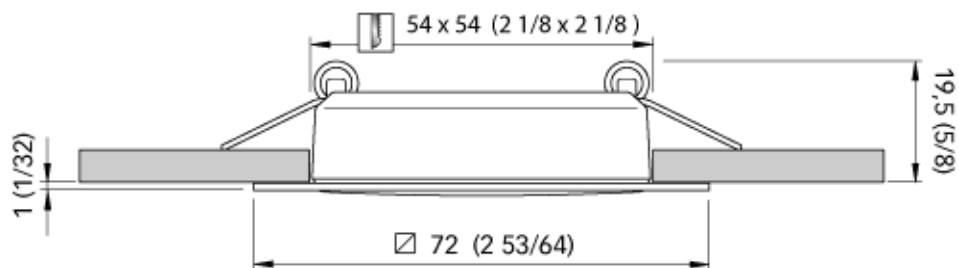

CONNECTION INFORMATION


WARNINGS

Use the unit in ultra-low voltage (SELV) with a LED power supply with **CONSTANT VOLTAGE OUTPUT**.


Do not plug the unit directly into the wall socket (AC).

GENERAL INFORMATION TO CONNECT MORE THAN ONE DEVICE


This product can be connected in parallel with LED power supply with **CONSTANT VOLTAGE OUTPUT**.

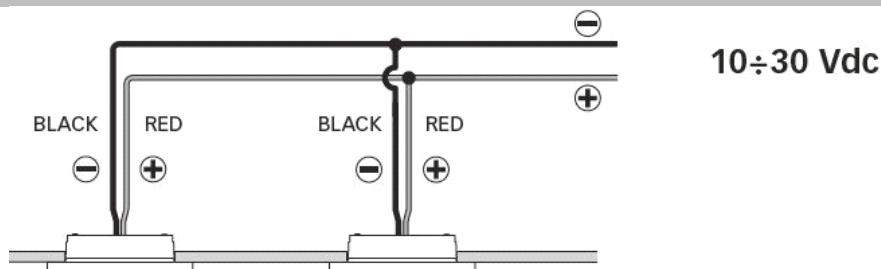

INSTRUCTIONS FOR ASSEMBLY

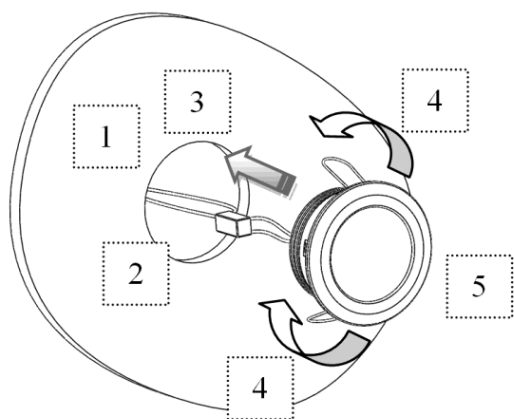

1. Drill hole or recessed for the product of the amount indicated in the table.
2. In the panel or wall in which you apply the light source must be present the wires from the power supply.
3. Electrical connection: the positive is the red cable, the negative is the black cable.
4. Position the springs as shown in the figure to facilitate the entry of the product into the hole.
5. Insert the light body within the hole by turning it in the desired position.



Greenbox is a wide range of accessories for the installation of recessed lights. More details relating to the **Greenbox** product line on the site www.quicklighting.com