

TODD 2W

Foglio 1 di 4

TIPO APPARECCHIO

LUCI LED DA INCASSO



CARATTERISTICHE GENERALI

| MATERIALI

Grado di protezione	IP40	CORNICE	LUCIDATO / BIANCO 9010 / SATINATO
Applicazione	SOFFITTO-PARETE	CORPO	PLASTICA
Dimensioni	Ø 72 mm	DIFFUSORE	POLICARBONATO
Recesso	16 mm		
Foratura	Ø 54 mm		
Peso	20 gr		
Fissaggio	MOLLE		
Orientabile	No		
Flessibile	No		
Interruttore	No		

SPECIFICHE ELETTRICHE

TIPO ALIMENTAZIONE

Tensione Costante

Sorgente Luminosa	2 POWER LED		
Tipo Apparecchio	Monocolore		
Alimentazione	10-30 Vdc		
Potenza	2 W		
Assorbimento			
Dimmerabile / Dimmer Consigliato	Si / FASP094CA2A3D00 HDIM300 D00	Modalità dimmerazione	PWM

DATI ILLUMINTECNICI



Temperatura colore

ANGOLO APERTURA: 100°	BIANCO CALDO (2900-3100 °K)	BIANCO NATURALE (3800-4100 °K)	BIANCO FREDDO (5500-6500 °K)
CRI	90	80	
Flusso luminoso	100 lm	125 lm	
Efficienza			
Ø a 1 m	2,31 m	40,8 lux	49,1 lux
Ø a 2 m	4,61 m	10,2 lux	12,3 lux
Ø a 3 m	6,92 m	4,5 lux	5,5 lux

Colori luce disponibili

 BIANCO CALDO

 BIANCO NATURALE



CERTIFICAZIONI



RoHS

TIPO APPARECCHIO

LUCI LED DA INCASSO


SPECIFICHE PER IL COLLEGAMENTO DEL SINGOLO APPARECCHIO

Dimensioni in mm (inches)

POTENZA: 2 W

ALIMENTAZIONE: 10-30 Vdc

ASSORBIMENTO:

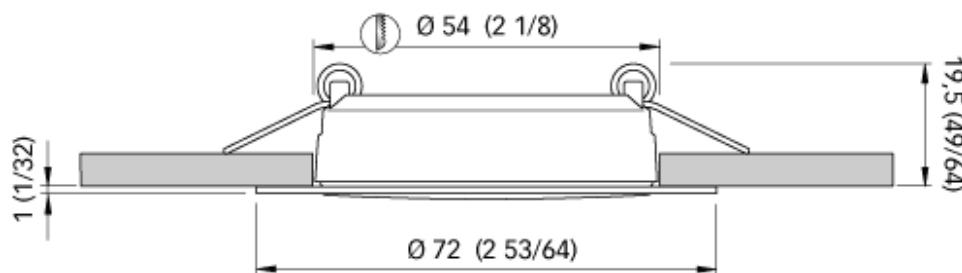

INDICAZIONI PER IL COLLEGAMENTO


AVVERTENZE

Utilizzare l'apparecchio in bassissima tensione (SELV) con alimentatore LED in **TENSIONE COSTANTE**.

Non collegare l'apparecchio direttamente alla corrente di rete (AC).


INDICAZIONI GENERALI PER COLLEGARE PIU' DI UN APPARECCHIO

Questo prodotto si può collegare in parallelo con alimentatore LED in **TENSIONE COSTANTE**.

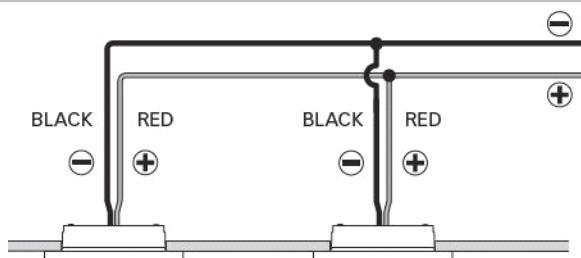


10÷30 Vdc

INDICAZIONI PER IL MONTAGGIO

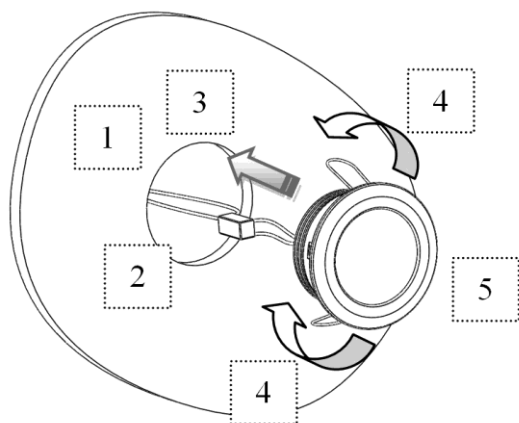

1. Praticare il foro o scasso, per il prodotto corrispondente, della misura indicata in tabella.
2. Nel pannello o muro al quale applicare il punto luce devono essere presenti i cavi provenienti dall'alimentatore.
3. Collegamento elettrico: il positivo è il cavo di colore rosso, il negativo è il cavo di colore nero.
4. Posizionare le molle come illustrato in figura per favorire l'ingresso del prodotto nel foro praticato.
5. Inserire il corpo luce all'interno del foro ruotandolo nella posizione desiderata.



Greenbox è una vasta gamma di accessori per l'installazione degli apparecchi ad incasso. Maggiori dettagli relativi alla linea **Greenbox** sul sito www.quicklighting.com

TODD 2W

Pag. 3 of 4

CATEGORY

DOWNLIGHT



GENERAL FEATURES

MATERIALS

IP Protection grade	IP40	BEZEL	POLISHED / WHITE 9010 / SATIN
Installation on	CEILING-WALL	BODY	PLASTIC
Dimensions	Ø 72 mm	DIFFUSER	POLYCARBONATE
Recess	16 mm		
Mounting hole	Ø 54 mm		
Weight	20 gr		
Fixing system	SPRINGS		
Orientable	No		
Flexible	No		
Switch	No		

ELECTRICAL SPECIFICATIONS

TYPE OF POWER

Constant Voltage

Light source	2 POWER LED		
Light Type	One Color		
Power supply	10-30 Vdc		
Power consumption	2 W		
Absorption			
Dimmable / Recommended dimmer	Yes / FASP094CA2A3D00 HDIM300 D00	Dimmer mode	PWM

PHOTOMETRIC DATA



Color Temperature

BEAM ANGLE: 100	WARM WHITE (2900-3100 °K)	DAY LIGHT (3800-4100 °K)	COOL WHITE (5500-6500 °K)
CRI	90	80	
Luminous flux	100 lm	125 lm	
Luminous efficacy			
Ø at 1 m	2,31 m	40,8 lux	49,1 lux
Ø at 2 m	4,61 m	10,2 lux	12,3 lux
Ø at 3 m	6,92 m	4,5 lux	5,5 lux

Available light colours

WW

DL



CERTIFICATIONS



RoHS

CATEGORY

DOWNLIGHT


SPECIFICATION FOR THE CONNECTION OF INDIVIDUAL UNIT

Dimensions - mm (inches)

POWER: 2 W

POWER SUPPLY: 10-30 Vdc

OPERATING VOLTAGE

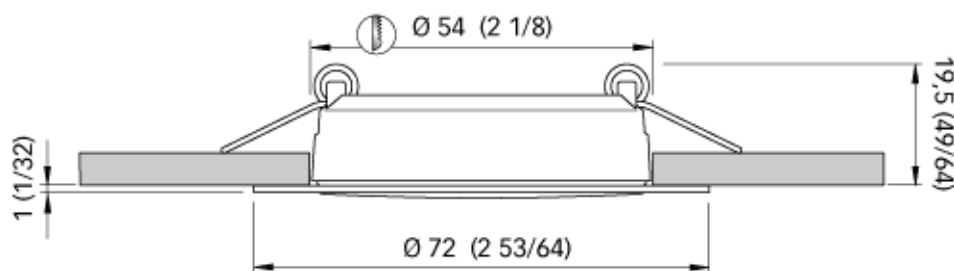

CONNECTION INFORMATION


WARNINGS

Use the unit in ultra-low voltage (SELV) with a LED power supply with **CONSTANT VOLTAGE OUTPUT**.


Do not plug the unit directly into the wall socket (AC).

GENERAL INFORMATION TO CONNECT MORE THAN ONE DEVICE


This product can be connected in parallel with LED power supply with **CONSTANT VOLTAGE OUTPUT**.

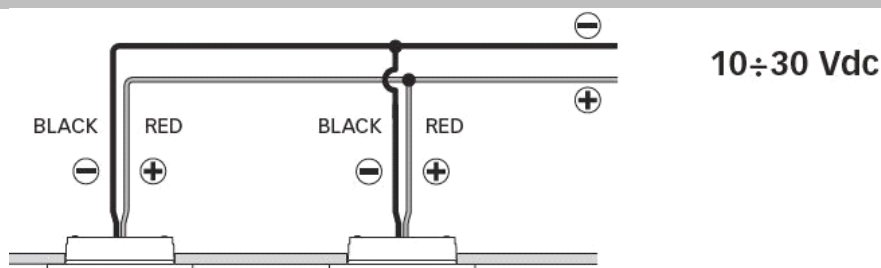

INSTRUCTIONS FOR ASSEMBLY

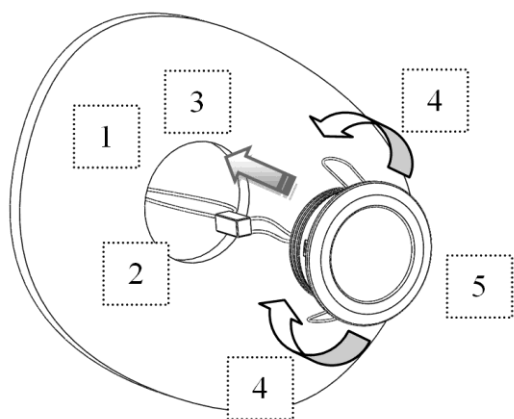

1. Drill hole or recessed for the product of the amount indicated in the table.
2. In the panel or wall in which you apply the light source must be present the wires from the power supply.
3. Electrical connection: the positive is the red cable, the negative is the black cable.
4. Position the springs as shown in the figure to facilitate the entry of the product into the hole.
5. Insert the light body within the hole by turning it in the desired position.



Greenbox is a wide range of accessories for the installation of recessed lights. More details relating to the **Greenbox** product line on the site www.quicklighting.com